


## UC400 23 Cat.6

### U/UTP Installation Cable

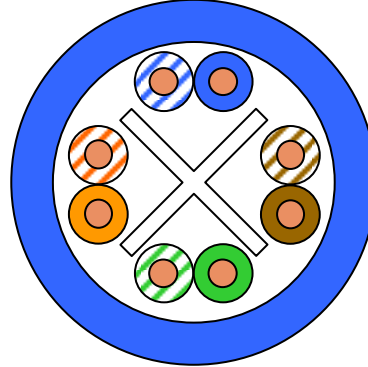

### Application

Primary (Campus), Secondary (Riser), Tertiary (Horizontal)  
IEEE 802.3: 10Base-T; 100Base-T; 1000Base-T;  
IEEE 802.5 16 MB; ISDN; TPDDI; ATM

### Standards

EIA/TIA-568-B.2-1 6/2002.  
ISO/IEC 11801 2<sup>nd</sup> ed.; IEC 61156-5  
EN 50173-1, EN 50288-6-1

### Flame resistance

PVC: IEC 60332-1  
LSHF: IEC 60332-1; IEC 60754-2; IEC 61034

### Construction

Conductor	bare copper wire Ø 0.57 mm (AWG23)
Insulation	Polyethylene, Ø 1.0 mm
Twisting	2 cores to the pair
Cable lay up	4 pairs to the core non metallic cross separator (spline)
Sheath	PVC or LSHF (FRNC, LSOH), blue RAL 5012

## UC400 23 Cat.6

### Mechanical properties

Minimum bending radius	Installation	8 x D
	Installed	4 x D
Temperature range	during operation	-20°C up to + 60°C
	during installation	0°C up to + 50°C

### Electrical properties

at 20°C

DC loop resistance	≤ 176 Ω /km
Resistance unbalance	≤ 2%
Insulation resistance (500 V)	≥ 5000 MΩ *km
Capacitance at 800 Hz	Nom. 48 nF/km
Capacitance unbalance (pair to ground)	≤ 1500 pF/km
Mean impedance 100 MHz	100 ± 5 Ω
Nominal velocity of propagation	Approx. 67 %
Propagation delay	Nominal 535 ns/100m
Delay skew	Nominal 20 ns/100m
Test voltage (DC, 1 min)	1000 V
Core/Core	
Coupling attenuation	≥ 40 dB

### Transmission characteristics acc. to Category 6

at 20°C

f (MHz)	Attenuation (dB/100m)		NEXT (dB)		PS-NEXT (dB)		ACR (dB/100m)		PS-ACR (dB/100m)		ELFEXT (dB/100m)		PS-ELFEXT (dB/100m)		Return loss (dB)
	max.	Nom.	min.	nom.	min.	Nom.	Min.	Nom.	Min.	Nom.	min.	Nom.	min.	Nom.	
1	2.1	1.9	74	78	72	75	72.0	76.1	70.0	73.1	68	82	65	80	20
4	3.8	3.8	65	69	63	66	61.2	65.2	59.2	62.2	56	70	53	68	23
10	6.0	6.0	59	63	57	60	53.0	57.0	51.0	54.0	48	62	45	60	25
16	7.6	7.6	56	60	54	57	48.4	52.3	46.4	49.3	44	58	41	56	25
20	8.5	8.5	55	59	53	56	46.5	50.0	44.5	47.0	42	56	39	54	25
31.2	10.7	10.7	52	56	50	53	41.3	45.0	39.3	42.0	38	52	35	50	23.6
62.5	15.5	15.1	47	51	45	48	31.5	36.0	29.5	33.0	32	46	29	44	21.5
100	19.9	19.1	44	48	42	45	24.1	28.9	22.1	25.9	28	42	25	40	20.1
125	22.5	21.3	43	47	41	44	20.5	25.2	18.5	22.2	26	40	23	38	19.5
155.5	25.4	23.8	42	45	40	42	16.6	21.3	14.6	18.3	24	38	21	36	18.8
175	27.1	25.3	41	44	39	41	13.9	19.1	11.9	16.1	23	37	20	35	18.4
200	29.2	27.0	40	44	38	41	10.8	16.5	8.8	13.5	22	36	19	34	18.0
250	33.0	32.0	38	42	36	39	5.0	10.0	2.0	7.0	20	34	17	32	17.3
300		36.1		41		38		4.8		1.8		32		30	
400		41.7		39		36		-2.7		-5.7		30		28	

## UC400 23 Cat.6

### Product order data

Product code	Designation	Product name	Outer diameter mm	Fire load		Weight kg/km	Copper content kg/km	Tensile force N
				MJ/km	kWh/m			
1000134	J-2YY 4x2x0.56	UC400 23 Cat.6 4P	6.2	358	0.099	39	20,5	100
1000625	J-2YH 4x2x0.56	UC400 23 Cat.6 4P LSHF		329	0.091	40		

[PRODUCT CODE TABLE]

© PRYSMIAN GROUP 2012, All Rights Reserved

All sizes and values without tolerances are reference values. Specifications are for product as supplied by Prysmian Group: any modification or alteration afterwards of product may give different result.

The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Prysmian Group. The information is believed to be correct at the time of issue. Prysmian Group reserves the right to amend this specification without prior notice. This specification is not contractually valid unless specifically authorised by Prysmian Group.